




Green Pin® EJ Turnbuckle

Turnbuckle with eye-jaw end-fitting and cotter pin or safety bolt (depending on size), generally to ASTM1145-92

- **Material:** drop forged high tensile steel SAE 1035 or 1045
- **Safety factor:** MBL equals 5 x WLL
- **Standard:** generally to ASTM F1145-92
formerly U.S. Federal Specification FF-T-791b
- **Finish:** hot dipped galvanized
- **Certification:** 2.1 2.2 3.1 MTC^a CE



G-6315

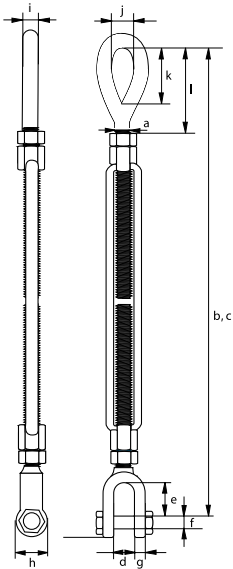

working load limit	diameter thread	take up	length closed position	length open position	opening jaw	length inside jaw	diameter pin jaw	thickness eye jaw	diameter eye jaw	diameter eye	width inside eye	length inside eye	length closed position	weight each
t	a inch	inch	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	l mm	kg
0.54	3/8	6	283	418	12	21	8	9	21	10	13	29	49	0.52
1	1/2	6	315	446	16	26	10	11	25	12	18	36	58	0.88
1	1/2	9	390	598	16	26	10	11	25	12	18	36	57	1.13
1.59	5/8	12	466	751	16	26	10	11	25	12	18	36	57	1.37
1.59	5/8	6	363	486	18	32	13	14	33	14	21	45	79	1.55
1.59	5/8	9	438	639	18	32	13	14	33	14	21	45	78	1.84
1.59	5/8	12	514	790	18	32	13	14	33	14	21	45	78	2.17
2.36	3/4	6	391	510	24	38	16	16	41	17	26	54	89	2.28
2.36	3/4	9	467	663	24	38	16	16	41	17	26	54	89	2.82
2.36	3/4	12	542	815	24	38	16	16	41	17	26	54	88	2.95
2.36	3/4	18	694	1120	24	38	16	16	41	17	26	54	89	3.30
3.27	7/8	12	583	848	27	42	19	19	48	20	32	61	101	4.35
3.27	7/8	18	735	1153	27	42	19	19	48	20	32	61	101	5.46
4.54	1	6	473	579	31	50	22	20	54	24	37	76	118	4.66
4.54	1	12	624	884	31	50	22	20	54	24	37	76	117	5.94
4.54	1	18	776	1190	31	50	22	20	54	24	37	76	117	7.98
4.5	1	24	928	1494	31	50	22	20	54	24	37	76	116	8.35
6.9	1 1/4	12	677	950	44	71	29	26	68	29	47	91	145	10.4
6.9	1 1/4	18	833	1258	44	71	29	26	68	29	47	91	144	11
6.9	1 1/4	24	989	1566	44	71	29	26	68	29	47	91	144	12.9
9.71	1 1/2	12	716	983	52	71	35	28	80	32	55	106	156	13.1
9.71	1 1/2	18	871	1290	52	71	35	28	80	32	55	106	160	14.7
9.71	1 1/2	24	1023	1594	52	71	35	28	80	32	55	106	158	17.8
12.7	1 3/4	18	979	1356	60	86	41	33	90	38	61	120	197	22.3
12.7	1 3/4	24	1130	1662	60	86	41	33	90	38	61	120	196	27.5
16.8	2	24	1208	1728	63	93	51	40	107	46	69	147	230	42.9
27.2	2 1/2	24	1343	1899	75	114	57	41	143	51	80	165	274	68
34	2 3/4	24	1399	1953	90	110	70	41	158	57	84	178	284	91

INFO CAD

continued on next page >