




Green Pin Power Sling® Shackle BN

High load capacity, grade 8 shackle with safety bolt



P-6043

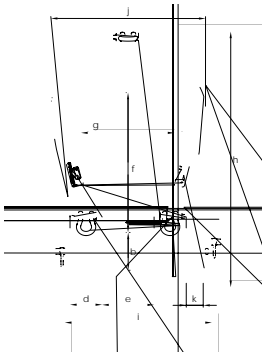

- **Material:** bow and pin alloy steel, grade 8, quenched and tempered
- **Safety Factor:** MBL equals 5 x WLL
- **Finish:** shackle bow painted silver, pin painted green
- **Temperature Range:** -40°C up to +200°C
- **Certification:** 2.1 2.2 3.1 MTC[®] LROS MPI[®] US[®] DNV GL 0377 DNV GL 0378 CE

working load limit	diameter pin	diameter eye	width eye	width inside	length inside	width bow	length bow	length bolt	width	thickness nut	bearing surface	weight each
t	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	l mm	kg
125	80	166	85	134	364	220	631	382	370	36	205	95
150	95	182	90	144	389	250	703	408	420	42	248	134
200	105	204	100	154	479	276	838	446	475	47	290	195
250	120	238	110	174	539	300	938	503	515	60	314	271
300	134	260	121	189	599	350	1031	550	605	60	345	368
400	160	305	140	224	620	37	E/C /Span <</Lang (nl-NL)/MCID		11400 >C 4.433 0 505 0 Td12503522 0			

125	3 ^{5/32}	6 ^{17/32}	3 ^{11/32}	5 ^{9/32}	14 ^{11/32}	8 ^{21/32}	24 ^{27/32}	15 ^{1/32}	14 ^{9/16}	1 ^{13/32}	8 ^{1/16}	210
150	3 ^{3/4}	7 ^{5/32}	3 ^{17/32}	5 ^{21/32}	15 ^{5/16}	9 ^{27/32}	27 ^{11/16}	16 ^{1/16}	16 ^{17/32}	1 ^{21/32}	9 ^{3/4}	296
200	4 ^{1/8}	8 ^{1/32}	3 ^{15/16}	6 ^{1/16}	18 ^{7/8}	10 ^{7/8}	33	17 ^{9/16}	18 ^{11/16}	1 ^{27/32}	11 ^{13/32}	430
250	4 ^{23/32}	9 ^{3/8}	4 ^{11/32}	6 ^{27/32}	21 ^{7/32}	11 ^{13/16}	36 ^{15/16}	19 ^{13/16}	20 ^{9/32}	2 ^{3/8}	12 ^{3/8}	598
300	5 ^{9/32}	10 ^{1/4}	4 ^{3/4}	7 ^{7/16}	23 ^{19/32}	13 ^{25/32}	40 ^{19/32}	21 ^{21/32}	23 ^{13/16}	2 ^{3/8}	13 ^{19/32}	812
400	6 ^{5/16}	12	5 ^{1/2}	8 ^{13/16}	24 ^{13/32}	14 ^{9/16}	42 ^{7/16}	25 ^{3/8}	25 ^{21/32}	3 ^{5/32}		
500	7 ^{3/32}	13 ^{3/8}	5 ^{31/32}	10 ^{1/32}	26 ^{23/32}	17 ^{23/32}	48 ^{25/32}	28 ^{1/8}	30 ^{1/32}	3 ^{11/32}		
600	7 ^{7/8}	14 ^{3/8}	6 ^{11/16}	11 ^{1/32}	29 ^{3/32}	19 ^{9/32}	53 ^{9/32}	31 ^{1/32}	32 ^{9/32}	3 ^{17/32}		
700	8 ^{15/32}	15 ^{15/16}	7 ^{7/8}	12 ^{19/32}	29 ^{17/32}	21 ^{1/4}	55 ^{23/32}	34 ^{19/32}	35 ^{1/4}	3 ^{15/16}	20 ^{5/32}	2840
800	9 ^{1/16}	16 ^{15/16}	7 ^{7/8}	13 ^{21/32}	33 ^{15/32}	21 ^{13/16}	60 ^{29/32}	37 ^{3/32}	36 ^{3/32}	4 ^{1/4}	21 ^{3/32}	3314
900	10 ^{1/32}	18 ^{3/4}	8 ^{15/32}	14 ^{11/16}	33 ^{15/32}	22 ^{27/32}	62 ^{29/32}	39 ^{7/8}	38 ^{3/16}	4 ^{23/32}	22 ^{1/16}	4077
1000	10 ^{5/8}	19 ^{11/16}	9 ^{1/8}	15 ^{29/32}	33 ^{15/32}	24 ^{3/16}	64 ^{21/32}	42 ^{23/32}	40 ^{1/4}	4 ^{29/32}	23 ^{7/32}	4824
1250	11 ^{13/16}	22 ^{7/16}	9 ^{21/32}	17 ^{13/32}	36 ^{17/32}	25 ^{19/32}	71 ^{11/32}	45 ^{27/32}	45 ^{1/32}	5 ^{1/2}	26 ^{3/8}	6467

CAD RFID